



BMDO ISAW - 100 IA

▷	○		
0°	20-100		
	11 kW		Ø 360 x 2,7 mm




BMDO ISAW - 80 VA

▷	○	Vice Opening	Feeding Stroke
0°	20-80	85 (max)	500 - 3000 max (One Stroke 500mm Multi Stroke 3000 mm)
	5,5 kW		Ø 280 ~ Ø350/2.0t ~ 3.0t (max) m/min




BMSO 570 XS

▷	○		
0°	570	600 x 570	570
	7,5 kW		7400 x 54 x 1,6 mm

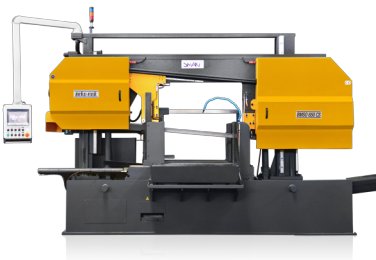

BMSO 650 CS/CH NC

▷	○		
0°	650	1050 - 600	600
	7,5 kW		8400 x 54 x 1,6 mm



BMSO 560 CS/CH NC

▷	○		
0°	560	600 x 560	560
	5,5 kW		6000 x 41 x 1,3 mm



BMSO 460 CS/CH NC

▷	○		
0°	560	6020 x 560	560
	4 kW		4800 x 34 x 1,1 mm



BMSO 360 CS/CH NC

▷	○		
0°	560	6020 x 560	560
	4 kW		4800 x 34 x 1,1 mm



BMSO 330 CS/CH NC

▷	○		
0°	330	360 x 330	330
	3 kW		4380 x 34 x 1,1 mm



P-SAW 330 CS

▷	○		
0°	330	360 x 330	330
	3 kW		4380 x 34 x 1,1 mm



BMSO 540 CGH/CGS NC


▷	○		
0°	540	670 x 540	540
30° R	540	670 x 540	540
45° R	510	450 x 540	450
60° R	270	250 x 540	250
	4 kW		6000 x 41 x 1,3 mm




3 Mt Roller Table



Microspray Coolant



Hexagonal Vice



Hydraulic Blade Tension

Explanatories



Manual



Semiautomatic



Automatic



Numeric Control



0° Mitre Capacity



0° / -45° Mitre Capacity



0° / -60° Mitre Capacity



0° / -75° Mitre Capacity



BMSO 440 CGH/CGS NC

	○	□	□
0°	450	610 x 425	425
30° R	450	560 x 425	425
45° R	430	430 x 425	425
60° R	320	260 x 425	290


kW: 4 kW **mm:** 5400 x 41 x 1,3 mm



BMSO 325 CGH/CGS NC

	○	□	□
0°	325	400 x 315	315
30° R	325	380 x 315	315
45° R	300	300 x 315	300
60° R	200	200 x 315	200

kW: 2,2 kW **mm:** 4380 x 34 x 1,1 mm

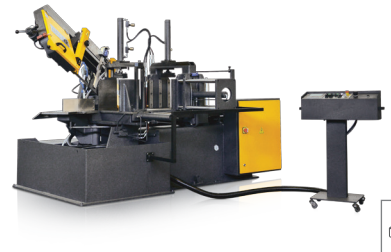

BMSO 320 GHL NC

	○	□	□
0°	320	610 x 320	320
30° L	260	280 x 200	225
45° L	320	355 x 320	320
60° L	320	510 x 320	320
75° L	320	580 x 320	320


kW: 2,2 kW **mm:** 4160 x 34 x 1,1 mm



BMSO 320 GH NC

	○	□	□
0°	320	350 x 320	320
45° L	260	250 x 180	180
60° L	300	300 x 200	250
75° L	320	350 x 200	300


kW: 2,2 kW **mm:** 3660 x 27 x 0,9 mm

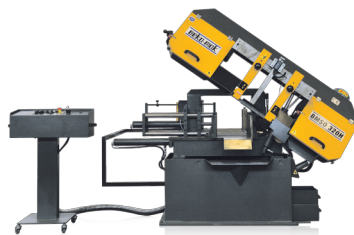

BMSO 320 H NC

	○	□	□
0°	320	610 x 320	320

kW: 2,2 kW **mm:** 3660 x 27 x 0,9 mm

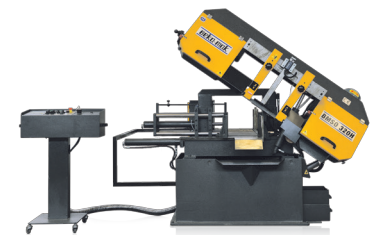

BMSO 320 LH NC

	○	□	□
0°	320	350 x 320	320

kW: 2,2 kW **mm:** 4160 x 34 x 1,1 mm



BMSY 650 DG NC

	○	□	□
0°	650	100 x 600	600
45° R	650	660 x 600	600
60° R	440	440 x 600	440
45° L	650	660 x 600	600


kW: 7,5 kW **mm:** 8400 x 54 x 1,6 mm



BMSY 560 DG / DG NC

	○	□	□
0°	560	820 x 540	540
45° R	550	550 x 540	540
60° R	360	360 x 540	360
45° L	550	550 x 540	540

kW: 4 kW **mm:** 6800 x 41 x 1,3 mm

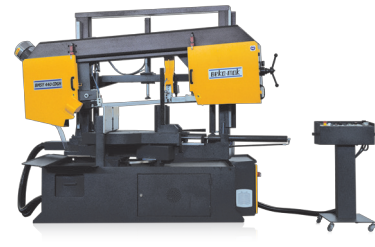


BMSY 440 CDGH / CDGH NC

	○	□	□
0°	440	640 x 440	440
45° R	440	400 x 440	400
60° R	250	250 x 440	250
45° L	390	390 x 440	390

kW: 4 kW **mm:** 5200 x 41 x 1,3 mm




Laser Pointer



Chip Conveyor




Hydraulic Top Clamping



Sensitive Pressure



45° / 0° Mitre Capacity



75° / 0° Mitre Capacity



60° / 0° / -45° Mitre Capacity



60° / 0° Mitre Capacity



60° / 0° / -60° Mitre Capacity



BMSY 360 CDGH

	○	□	□
0°	360	640 x 360	360
45° R	360	390 x 360	360
60° R	310	250 x 360	270
45° L	360	390 x 360	360

kW: 3 kW **mm:** 5000 x 34 x 1,1 mm




BMSY 1515C			
○	□	□	
0°	1500	1510 x 1500	1500
kW	15 kW	1330 x 80 x 1,6 mm	



BMSY 1122C			
○	□	□	
0°	1100	1100 x 2300	1100
kW	15 kW	1310 x 80 x 1,6 mm	




BMSY 1313C			
○	□	□	
0°	1300	1300 x 1300	1300
kW	11 kW	12100 x 67 x 1,6 mm	

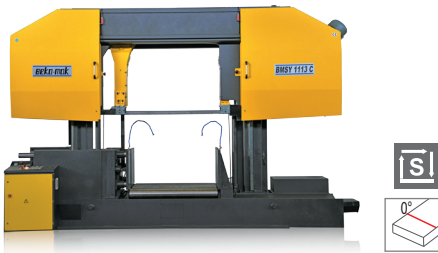

BMSY 1113C			
○	□	□	
0°	1100	1110 x 1300	1110
kW	11 kW	10900 x 67 x 1,6 mm	



BMSY 1110C			
○	□	□	
0°	1100	1110 x 1110	1110
kW	11 kW	10500 x 67 x 1,6 mm	

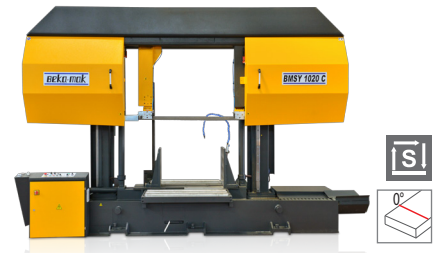

BMSY 1020C			
○	□	□	
0°	1020	1020 x 1020	1020
kW	7,5 kW	9500 x 54 x 1,6 mm	



BMSY 820C			
○	□	□	
0°	820	850 x 820	820
45°	480	480 x 820	480
kW	7,5 kW	8200 x 54 x 1,6 mm	



BMSY 810C			
○	□	□	
0°	810	850 x 810	810
45°	480	480 x 810	480
kW	7,5 kW	8200 x 54 x 1,6 mm	




BMSY 560C			
○	□	□	
0°	560	750 x 560	560
45°	410	410 x 560	410
kW	4 kW	6000 x 41 x 1,3 mm	



BMSY 460C			
○	□	□	
0°	460	650 x 460	560
45°	380	380 x 460	380
kW	4 kW	5200 x 41 x 1,3 mm	



BMSY 360C			
○	□	□	
0°	380	520 x 380	380
45°	300	300 x 380	300
kW	3 kW	4800 x 34 x 1,1 mm	

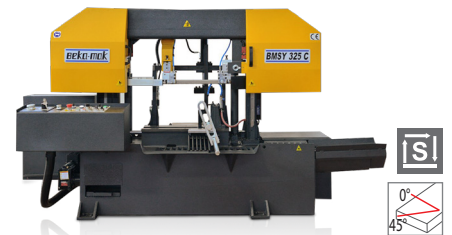

BMSY 325C			
○	□	□	
0°	325	450 x 325	325
45°	250	250 x 325	250
kW	2,2 kW	4160 x 34 x 1,1 mm	



BMSO 820C			
	○	□	□
0°	820	850 x 820	820
45°	480	480 x 820	480
kW	7,5 kW	8200 x 54 x 1,6 mm	




BMSO 810C			
	○	□	□
0°	810	850 x 810	810
45°	480	480 x 810	480
kW	4 kW	8200 x 41 x 1,3 mm	



BMSO 560C			
	○	□	□
0°	560	570 x 560	560
kW	4 kW	6000 x 41 x 1,3 mm	



BMSO 460C			
	○	□	□
0°	460	470 x 460	460
kW	4 kW	5200 x 34 x 1,3 mm	

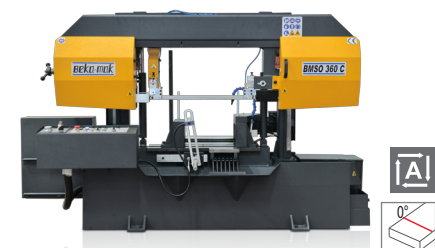

BMSO 360C			
	○	□	□
0°	380	430 x 380	380
kW	3 kW	4800 x 34 x 1,1 mm	



BMSO 325C			
	○	□	□
0°	325	350 x 325	325
kW	2,2 kW	4160 x 34 x 1,1 mm	



BMSY 810 CGH			
	○	□	□
0°	810	750 x 910	750
30° R	760	740 x 750	740
45° R	600	750 x 600	600
60° R	360	750 x 360	360
kW	4 kW	8200 x 41 x 1,3 mm	



BMSY 540 CGH			
	○	□	□
0°	540	750 x 540	540
30° R	540	600 x 540	540
45° R	540	450 x 540	450
60° R	270	250 x 540	250
kW	4 kW	6000 x 41 x 1,3 mm	



BMSY 440 CGH			
	○	□	□
0°	450	695 x 425	425
30° R	450	560 x 425	425
45° R	430	430 x 425	425
60° R	320	260 x 425	290
kW	4 kW	5400 x 41 x 1,3 mm	



BMSY 360 CGH			
	○	□	□
0°	360	700 x 360	360
30° R	360	590 x 360	360
45° R	360	450 x 360	360
60° R	325	280 x 360	290
kW	3 kW	5200 x 34 x 1,1 mm	



BMSY 325 CGH			
	○	□	□
0°	325	400 x 320	320
30° R	325	360 x 320	320
45° R	305	270 x 320	270
60° R	190	180 x 240	180
kW	2,2 kW	4380 x 34 x 1,1	



BMSY 320 GL			
	○	□	□
0°	320	610 x 320	320
45° R	320	355 x 320	320
60° R	320	510 x 320	320
75° R	320	580 x 320	320
kW	2,2 kW	4160 x 34 x 1,1 mm	